

CONCRETE: A benchmarking framework to CONtrol and Classify REpeatable Testbed Experiments

Stratos Keranidis*

Wei Liu, Michael Mehari,
Pieter Becue, Stefan Bouckaert, Ingrid Moerman,
Thanasis Korakis*, Iordanis Koutsopoulos* and Leandros Tassioulas*

University of Thessaly and CERTH, Greece*
Ghent University - iMinds, Gent, Belgium

Introduction

➤ The Problem:

- During experimentation in networking testbeds several different factors may impact the monitored performance of networks under consideration.
- As a result high variation exists among several executions of the same experiment.

➤ The Need:

Stable experimental conditions have to be guaranteed, in order to arrive at solid conclusions.

➤ Our Solution:

The novel **CONRETE** benchmarking framework that provides for evaluation of experimental stability.

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- CONCRETE Benchmarking Framework
- Insights and Future work

Related Projects

➤ **CREW**

- Establishes an **open federated test platform**, which facilitates experimentally-driven research on advanced **spectrum sensing, cognitive radio and cognitive networking** strategies in view of horizontal and vertical spectrum sharing in licensed and unlicensed bands.

➤ **OPENLAB**

- Delivers **control and experimental plane middleware** to facilitate early use of **testbeds** and exploiting proven technologies, developed in the **OneLab** and **Panlab** initiatives.



➤ **OPENLAB – CREW Collaboration**

- In order to improve the **reproducibility of wireless experiments**, OpenLab is interested to augment the OpenLab facilities with the CREW spectrum sensing benchmarking scenarios.

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- CONCRETE Benchmarking Framework
- Insights and Future work

Basic Experimental Scenario

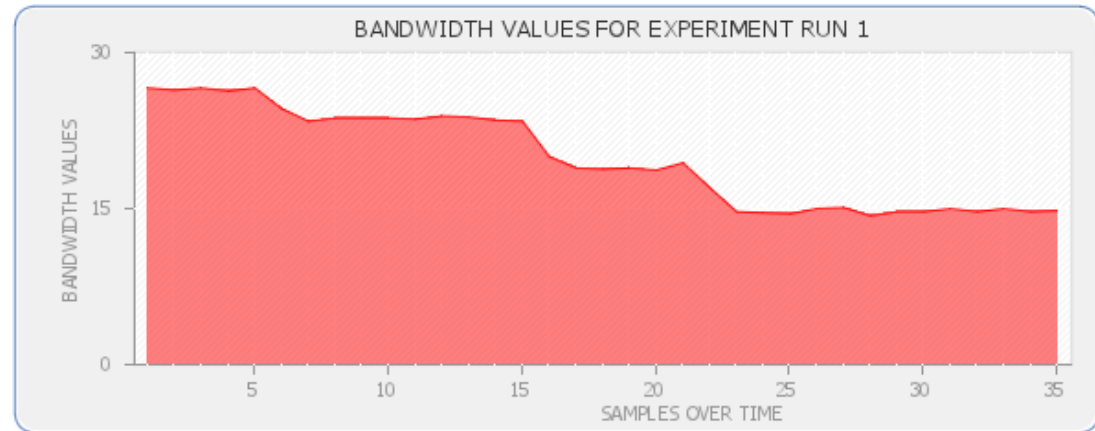
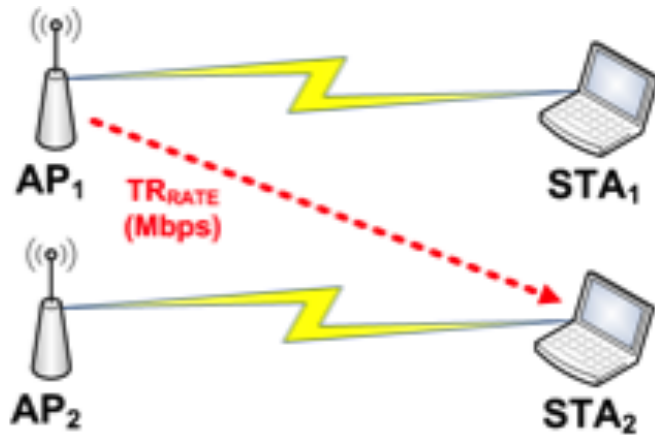


- 2 pairs of nodes contending for channel use.
- **AP2 - > STA2**: saturated traffic conditions
- **AP1 -> STA1**: varying traffic rate (TR_{RATE}) conditions
- We monitor the throughput performance of the **AP2-STA2** pair

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- CONCRETE Benchmarking Framework
- Insights and Future work

Interfering Factors (1/5)

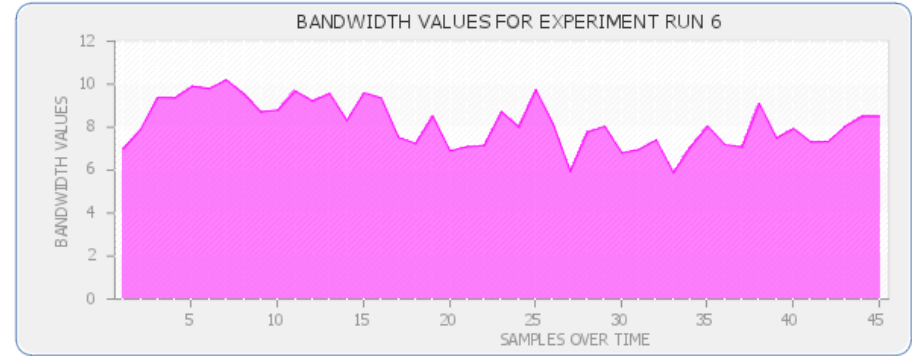
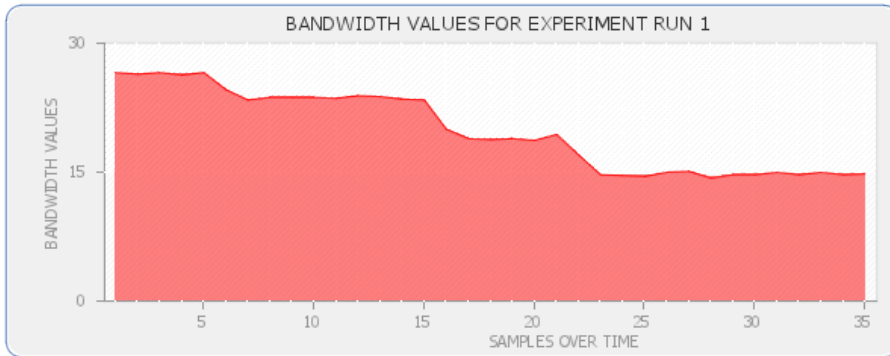


Specific executions of the same experiment may present different performance, due to:

Internal Interference

generated by testbed nodes, operated by other experimenters, which simultaneously transmit on the same or overlapping frequencies.

Interfering Factors (2/5)

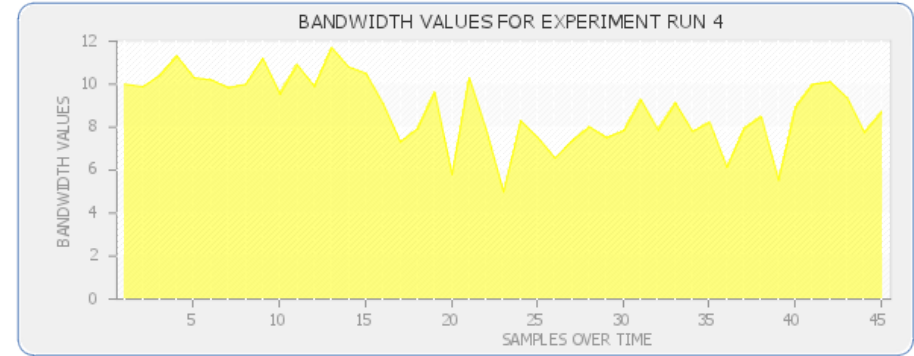
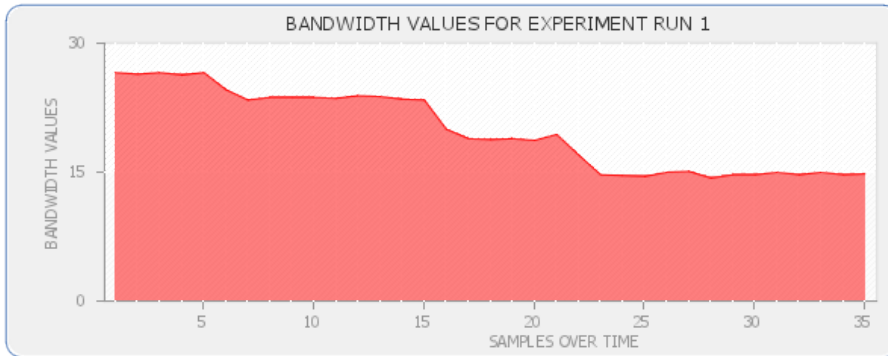


Specific executions of the same experiment may present different performance, due to:

External Interference

generated by collocated commercial devices belonging to external networks, which simultaneously transmit on the same or overlapping frequencies.



Interfering Factors (3/5)

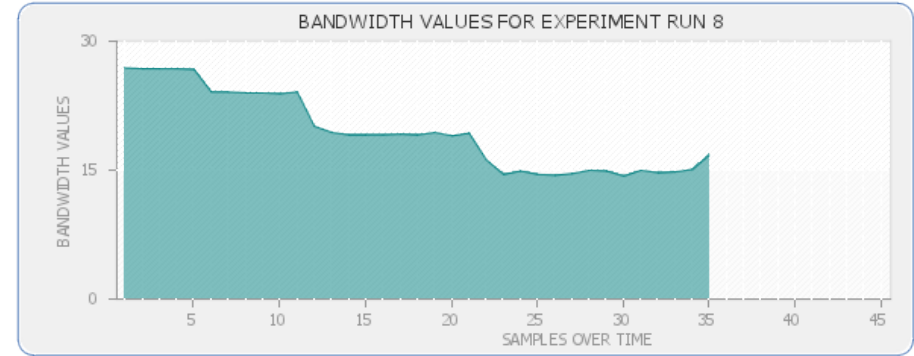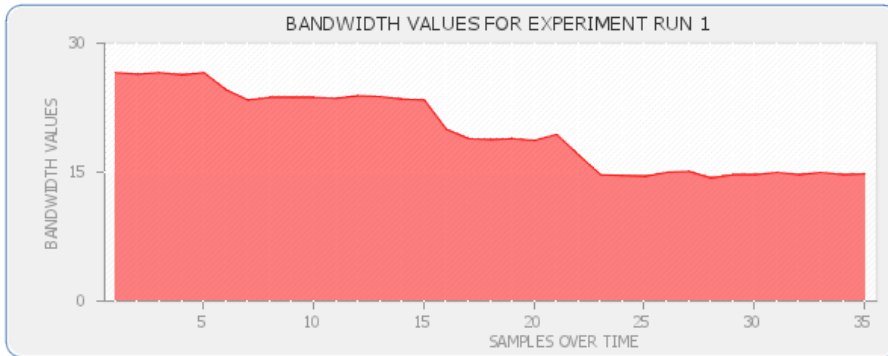

Specific executions of the same experiment may present different performance, due to various factors, such as:

stopping of normal execution due to hardware or software failure

Interfering Factors (4/5)

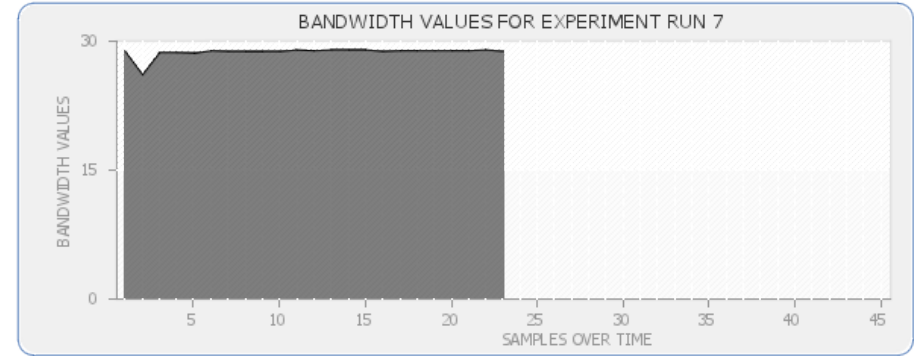
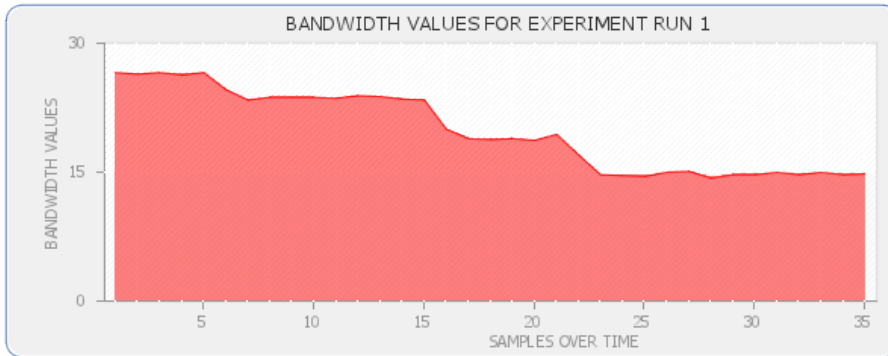


Specific executions of the same experiment may present different performance, due to various factors, such as:

**Different node positioning
(etc. mobile nodes behind obstacles)**

Interfering Factors (5/5)

The Result

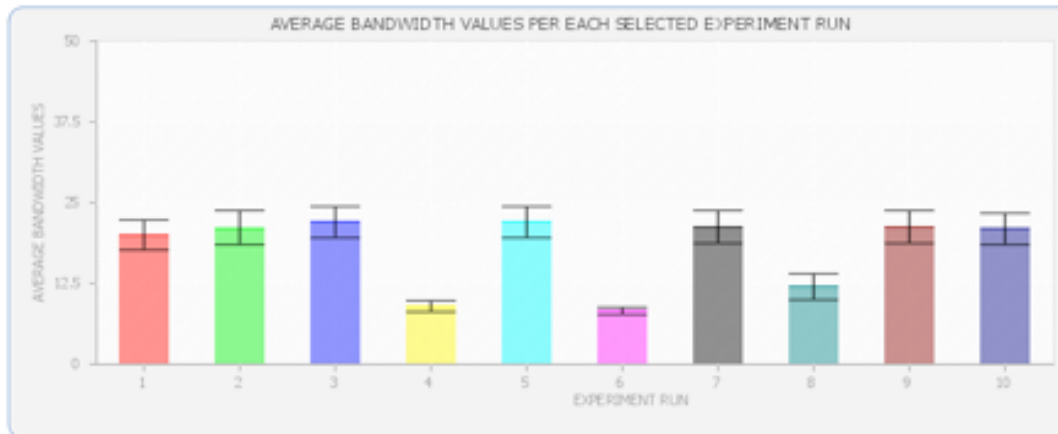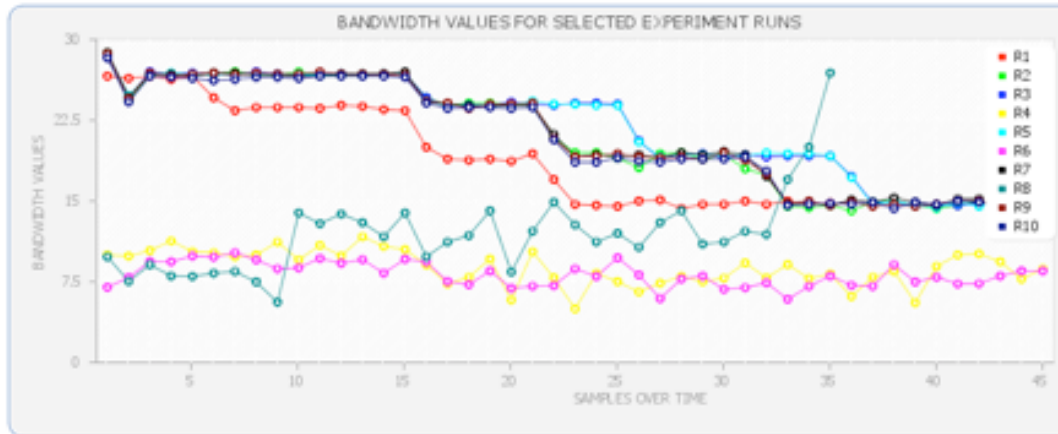

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- CONCRETE Benchmarking Framework
- Insights and Future work

Building Blocks



Advanced Spectrum
Sensing Techniques



OMF Control and
Management Framework

CONCRETE

iMinds w-ilab.t
Cognitive Testbed

Long experience with
instrumentation of
testbed experiments

Building Blocks – Correlation

$$\rho_{X,Y} = \text{corr}(X, Y) = \frac{\text{cov}(X, Y)}{\sigma_X \sigma_Y}$$

$$r = \frac{1}{(n-1)} \sum \frac{(X - \mu_X)(Y - \mu_Y)}{\sigma_X \sigma_Y}$$

- The well known measure of dependence is Pearson's correlation, which indicates the extent to which two random variables covary.
- The μ_X and μ_Y represents the mean of the data set X and Y respectively.
- The σ_X and σ_Y represents the standard deviation of the data set X and Y respectively

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- **CONCRETE Benchmarking Framework**
- Insights and Future work

CONCRETE Benchmarking Framework

CONtrol and Classify REpeatable Testbed Experiments

The 6 main functionalities that are currently supported, are:

1. **Scheduling** the execution of several runs for the same experiment
2. **Visualization** of prevailing **Channel Conditions** before each run and moreover visualization of the **Performance** achieved in each run
3. Estimation of **Correlation** among the different runs, in order to provide an appropriate benchmarking score that describes the stability of each run
4. **Calculation** of average performance and st. deviation values for each run
5. **Automatic** mechanism that **selects the most stable runs**, based on their correlation score
6. **Calculation of performance over all executed rounds** in comparison with the performance achieved only in the subset of selected rounds.

CONCRETE Benchmarking Framework (1/6)

1. **Scheduling** the execution of several runs for the same experiment

CONCRETE - CONTROL and Classify REpeatable Testbed Experiments

Provide your Experiment Details:

Username: Experiment_Name: Rounds: Table: Metric:

Correlation Threshold: Filter: Value:

Online Execution: Path and name of Experiment Description:

Interference Estimation: Frequency (MHz):

CONCRETE Benchmarking Framework (2/6)

2. **Visualization of Channel Conditions** before each run and moreover visualization of the **Performance** achieved in each run




CONCRETE Benchmarking Framework (3/6)

3. Estimation of **Correlation** among the different runs

CORRELATION MATRIX										
ID	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10
R1	1	0.9076	0.8738	0.7706	0.8802	0.5732	0.9127	-0.5042	0.9151	0.9178
R2	0.9076	1	0.9191	0.6533	0.9214	0.5852	0.9966	-0.6115	0.9973	0.9959
R3	0.8738	0.9191	1	0.6086	0.9987	0.6736	0.9127	-0.5077	0.9189	0.9131
R4	0.7706	0.6533	0.6086	1	0.6214	0.4738	0.6661	-0.2388	0.6673	0.6799
R5	0.8802	0.9214	0.9987	0.6214	1	0.6591	0.9148	-0.5007	0.9212	0.9154
R6	0.5732	0.5852	0.6736	0.4738	0.6591	1	0.5808	-0.308	0.5888	0.5869
R7	0.9127	0.9966	0.9127	0.6661	0.9148	0.5808	1	-0.6226	0.9987	0.9982
R8	-0.5042	-0.6115	-0.5077	-0.2388	-0.5007	-0.308	-0.6226	1	-0.6177	-0.6071
R9	0.9151	0.9973	0.9189	0.6673	0.9212	0.5888	0.9987	-0.6177	1	0.9986
R10	0.9178	0.9959	0.9131	0.6799	0.9154	0.5869	0.9982	-0.6071	0.9986	1





CONCRETE Benchmarking Framework (4/6)

4. Calculation of **AVG performance** and **ST. DEV.** for each run

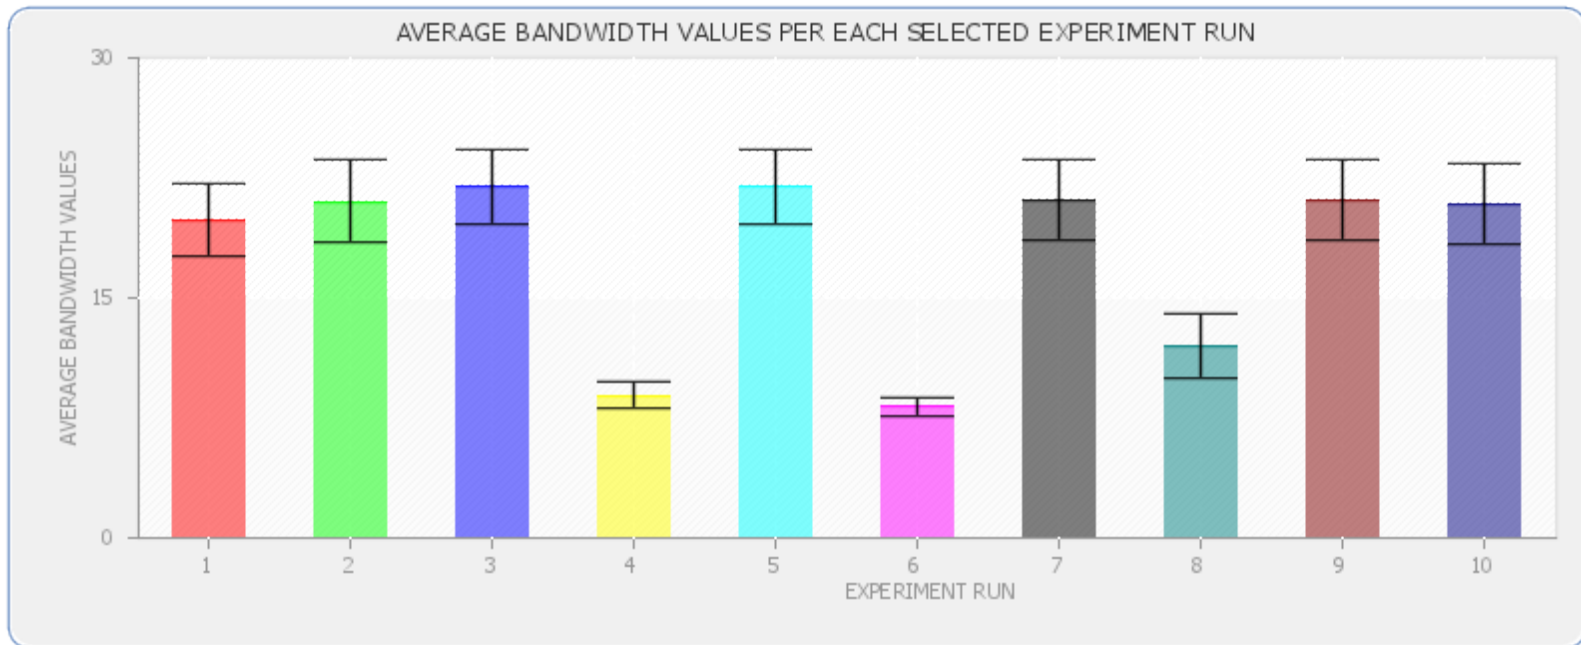

CONCRETE Benchmarking Framework (5/6)

5. **Automatic mechanism** that selects the most stable runs, based on their **correlation score**

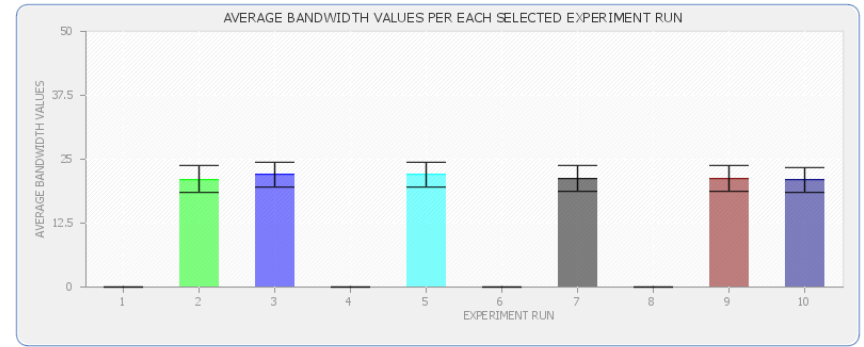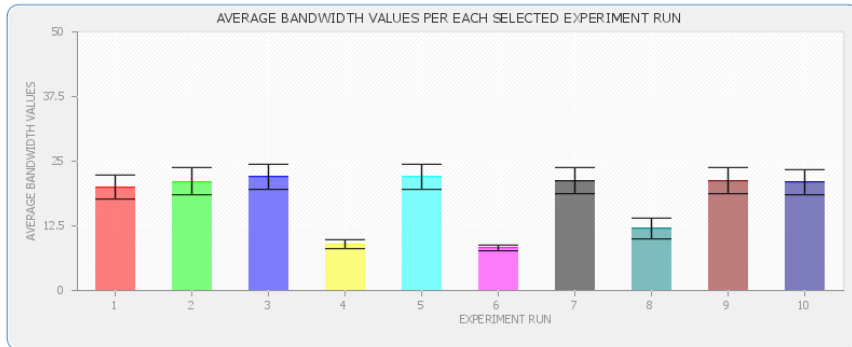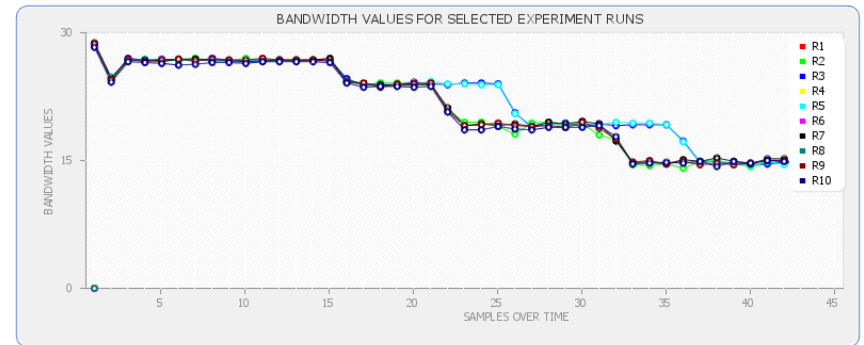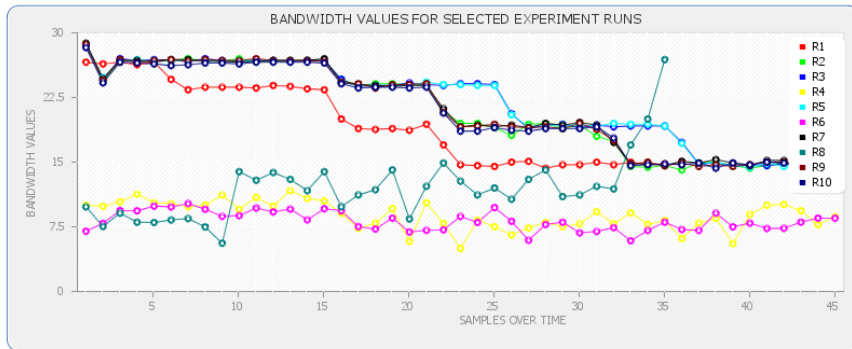

CONCRETE Benchmarking Framework (6/6)

6. Calculation of performance **over all executed rounds** in comparison with the performance achieved only in the **subset of selected rounds**.

AVERAGE AMONG ALL SUCCESSFUL RUNS: 17.656495238095
STDEV AMONG ALL SUCCESSFUL RUNS: 4.0677154655928

CALCULATE BASED ON SET OF SELECTED ROUNDS

YOU SELECTED 6 Round(s): 2 3 5 7 9 10

AVERAGE AMONG SELECTED RUNS: 21.3011111111111
STDEV AMONG SELECTED RUNS: 4.9083900551418

CORRELATION MATRIX

ID	R2	R3	R5	R7	R9	R10
R2	1	0.9426	0.9422	0.9977	0.998	0.9971
R3	0.9426	1	0.9991	0.9415	0.9444	0.9412
R5	0.9422	0.9991	1	0.9409	0.9442	0.9408
R7	0.9977	0.9415	0.9409	1	0.9987	0.9984
R9	0.998	0.9444	0.9442	0.9987	1	0.9988
R10	0.9971	0.9412	0.9408	0.9984	0.9988	1

MINIMUM CORRELATION AMONG ALL SUCCESSFUL RUNS: -0.6226
MINIMUM CORRELATION AMONG SELECTED RUNS: 0.9408

Outline

- Related Projects
- Basic Experimental Scenario
- Interfering Factors
- Building Blocks
- CONCRETE Benchmarking Framework
- **Insights and Future work**

Insights and Future Work

➤ Experimental Insights:

- Due to the high variation of wireless channel conditions there is a clear need for environment monitoring mechanisms that aid in arriving at **CONCRETE** conclusions.

➤ Future Work:

- Enable channel monitoring during the experiment execution through **Wi-Fi Monitor** nodes.
- Implement **Feature detection** mechanism to enable detection of transmissions generated by devices using heterogeneous technologies
- Examine performance **under various experiments and metrics** (energy etc.) and propose possible enhancements

Thank You!